



# GPL 12880

## 12V 88.0Ah

GPL 12880 is a general purpose battery with 10 years expected life under normal float charge. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.



### Specification

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	88Ah @ 20hr-rate to 1.75V per cell @25 °C (77°F)
<b>Weight</b>	Approx. 30kg(66.1 lbs)
<b>Maximum Discharge Current</b>	700A(5sec)
<b>Internal Resistance</b>	Approx. 6mΩ
<b>Operating Temperature Range</b>	Discharge: -20°C~50°C (-4°F~122°F) Charge: -20°C~50°C (-4°F~122°F) Storage: -20°C~40°C (-4°F~104°F)
<b>Nominal Operating Temperature Range</b>	25°C±3°C (77°F±5°F)
<b>Float Charging Voltage</b>	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
<b>Recommended Maximum Charging Current Limit</b>	26.4A
<b>Equalization and Cycle Service</b>	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
<b>Self Discharge</b>	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
<b>Terminal</b>	Thread Insert & Bolt
<b>Container Material</b>	-Polypropylene (UL94-HB)*Flammability resistance of UL94-V0 can be available upon request.


**UL**  
MH14533(N)

**TÜV CERT**  
ISO9001  
No : 041005117

**RWTV**  
ISO 14001  
NO.UM 1-12-0045

CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

### Dimensions

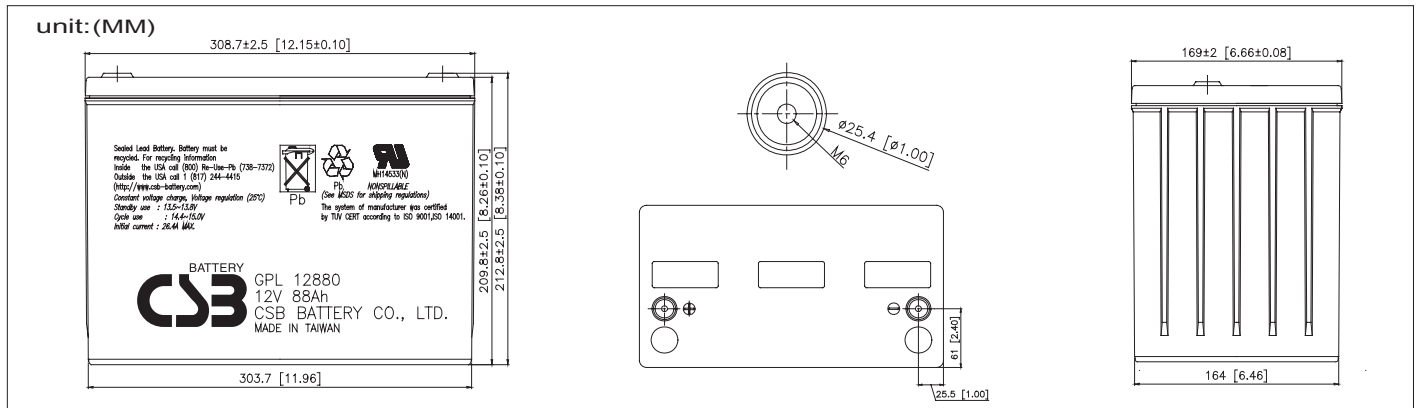

### Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	381.00	525.00	183.00	109.00	62.60	36.40	25.20	19.60	16.90	11.00	9.10	4.92
1.67V	348.10	231.70	178.10	106.90	61.62	35.77	24.78	19.46	16.76	10.86	9.01	4.87
1.70V	334.00	223.00	176.00	106.00	61.20	35.50	24.60	19.40	16.70	10.80	8.97	4.85
1.75V	296.00	205.00	166.50	100.50	59.45	34.95	24.15	19.05	16.40	10.60	8.93	4.82
1.80V	258.00	187.00	157.00	95.00	57.70	34.40	23.70	18.70	16.10	10.40	8.88	4.79
1.83V	220.00	169.00	147.50	89.50	55.95	33.85	23.25	18.35	15.810	10.20	8.84	4.76

### Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	4,010.00	2,774.00	2,020.00	1,250.00	731.00	426.00	297.00	231.00	1989.00	131.00	111.00	62.50
1.67V	3,730.00	2,558.40	1,957.00	1,222.00	721.20	421.00	292.80	228.90	197.60	130.30	110.30	62.15
1.70V	3,610.00	2,446.00	1,930.00	1,210.00	717.00	420.00	291.00	228.00	197.00	130.00	110.00	62.00
1.75V	3,240.00	2,273.00	1,860.00	1,155.00	698.50	413.50	286.50	224.50	194.00	128.00	108.50	60.90
1.80V	2,870.00	2,080.00	1,790.00	1,110.00	680.00	407.00	282.00	221.00	191.00	126.00	107.00	59.80
1.83V	2,500.00	1,887.00	1,720.00	1,045.00	661.50	400.50	277.50	217.50	188.00	124.00	105.50	58.70

• All mentioned values are average values.


## Trickle (or Float) Service Life

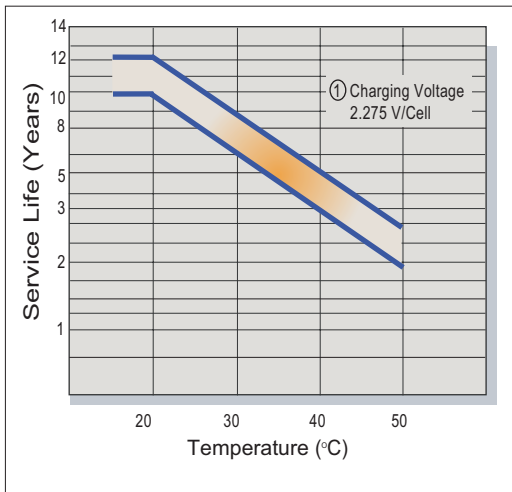


## Capacity Retention Characteristic

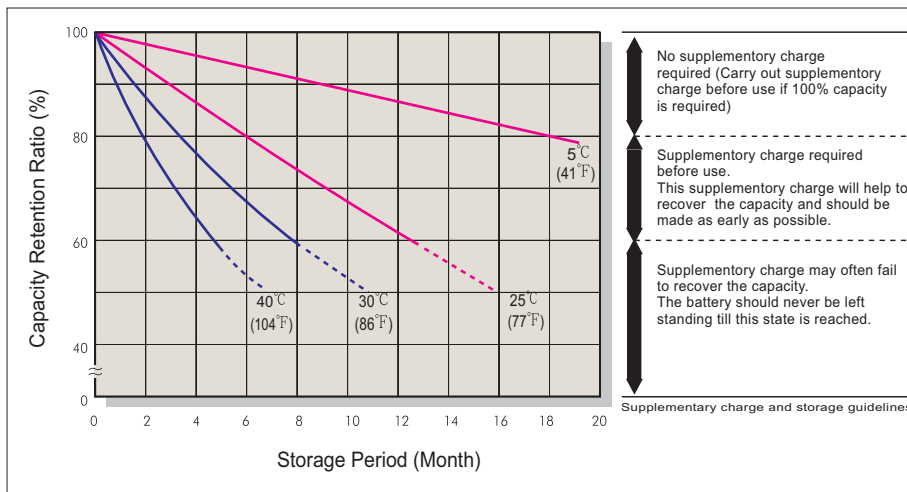


## Battery Voltage and Charge Time for Standby Use

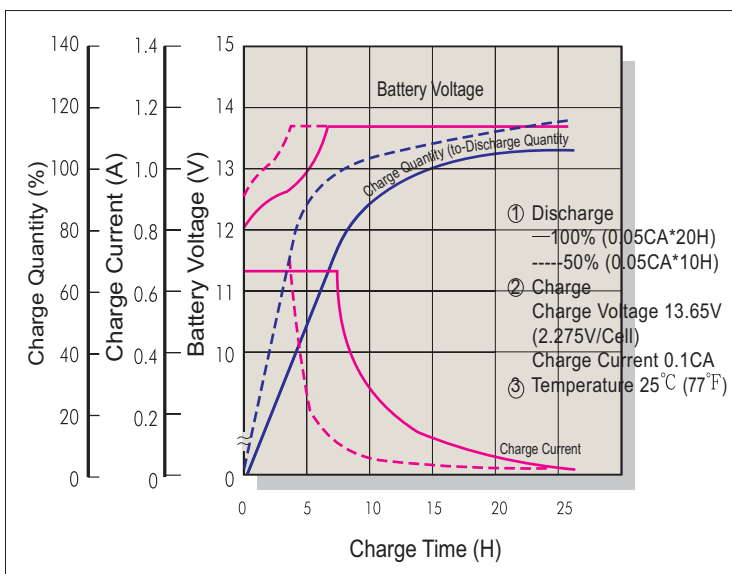

## Terminal Voltage (V) and Discharge Time (25°C 77°F)

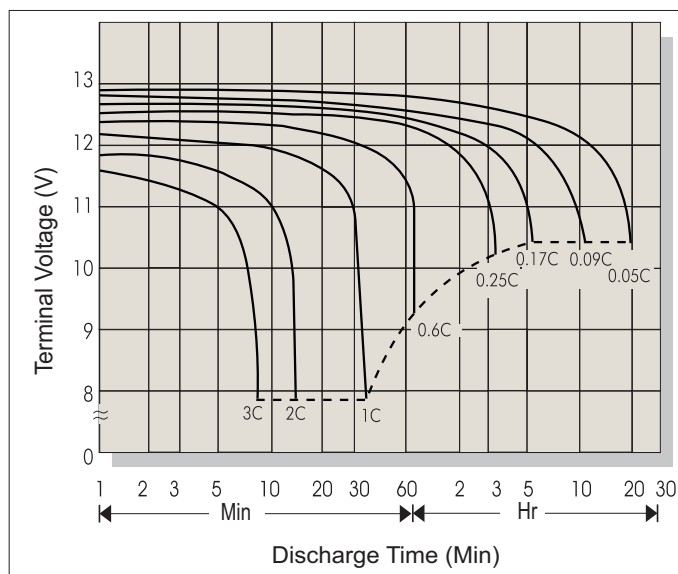

## Battery Voltage and Charge Time for Cycle Use

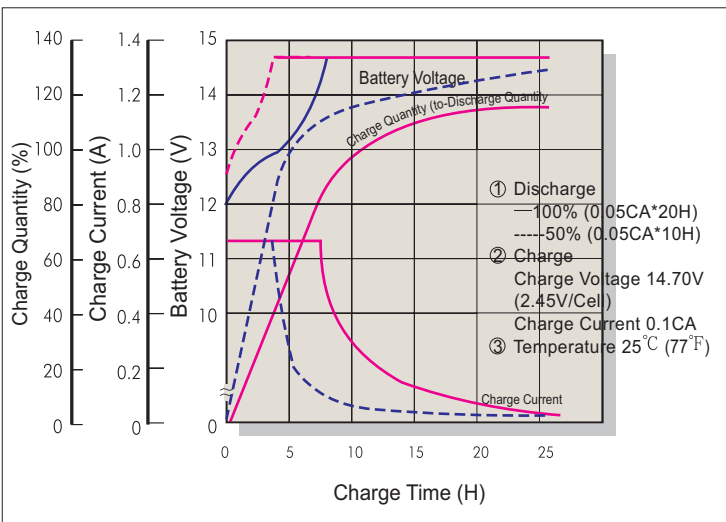

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C > (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C

## Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

Sales Office URL: [WWW.CSB-BATTERY.COM](http://WWW.CSB-BATTERY.COM)

**CSB BATTERY CO., LTD.**  
**TAIWAN OFFICE**  
 Tel: +886-2-8751-5000  
 Fax: +886-2-8751-6161  
 E-mail: [service@csb-battery.com.tw](mailto:service@csb-battery.com.tw)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHANGHAI OFFICE**  
 Tel: +86-21-5046-1622, 5046-0833  
 Fax: +86-21-5064-3314

**CSB BATTERY TECHNOLOGIES, INC**  
**USA OFFICE**  
 Tel: +1-817-244-7777/1-8003 CSBUSA(272872)  
 Fax: +1-817-244-4445  
 E-mail: [csb@csb-battery.com](mailto:csb@csb-battery.com)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**BEIJING OFFICE**  
 Tel: +86-10-6597-8060, 6597-8070  
 Fax: +86-10-6597-8050  
 E-mail: [chinasls@csb-battery.com](mailto:chinasls@csb-battery.com)

**CSB BATTERY OF NETHERLANDS B.V**  
**NETHERLANDS OFFICE**  
 Tel: +31(0) 180 418 140  
 Fax: +31(0) 180 418 327  
 E-mail: [eurosales@csb-battery.com](mailto:eurosales@csb-battery.com)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHENZHEN OFFICE**  
 Tel: +86-755-2694-2788/2606/2706  
 Fax: +86-755-2694-2748  
 E-mail: [she@csb-battery.com](mailto:she@csb-battery.com)