


# SANYO

# Cadnica

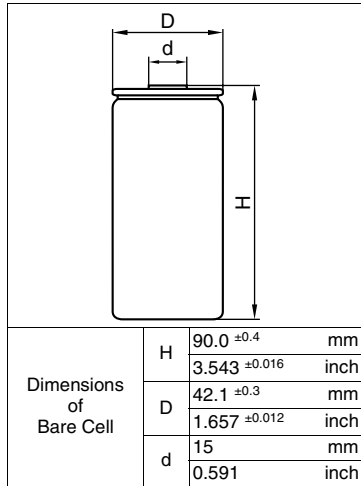


## Cell Type KR-MH Specifications


|   |           |  |
|---|-----------|--|
| Nominal Capacity                            |           | 10000mAh   |
| Nominal Voltage                             |           | 1.2V   |
| Charging Current                            | Trickle   | 333mA  |
|   | Standard  | 1000mA   |
| Charging Time                               | Trickle   | above 48Hrs.   |
|   | Standard  | 14 to 16Hrs.   |
| Ambient Temperature                         | Charge    | 0°C to +70°C [+32°F to 158°F]  |
|   | Discharge | -20°C to +70°C [-4°F to 158°F]   |
|   | Storage   | -30°C to +70°C [-22°F to 158°F]  |
| Internal Impedance (Av.) (at 50% discharge) |           | 2.6mΩ (at 1000Hz)  |
| Weight                                      |           | 400g/14.11oz   |
| Dimensions(D)×(H) (with tube)               |           | 43.1 <sup>0</sup> <sub>-1</sub> × 91.0 <sup>0</sup> <sub>-1.4</sub> mm<br>1.70 <sup>0</sup> <sub>-0.04</sub> × 3.58 <sup>0</sup> <sub>-0.06</sub> inch |

### Typical Characteristics


#### Charge

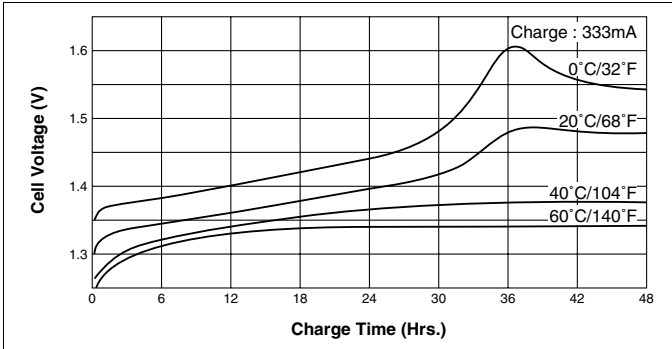


#### Discharge (at high rate)

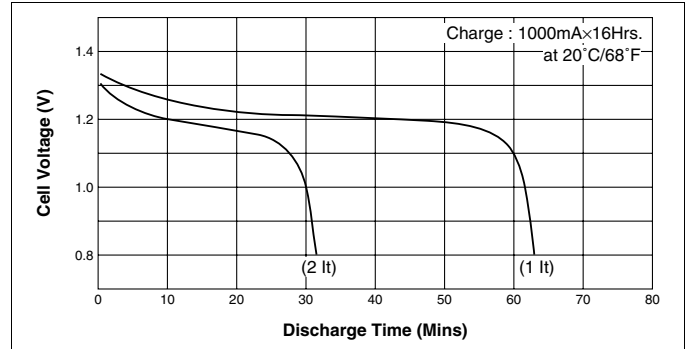


#### Charge

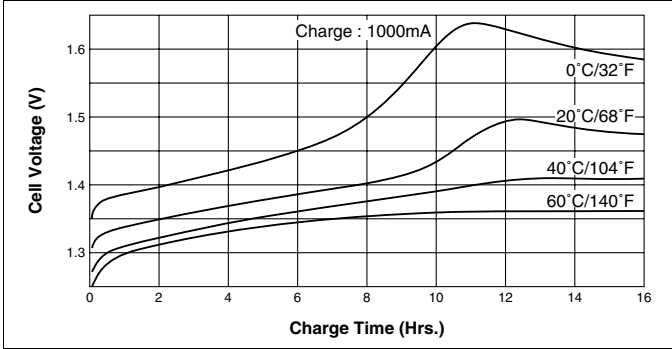

#### Discharge Trickle charge (at high temperature)

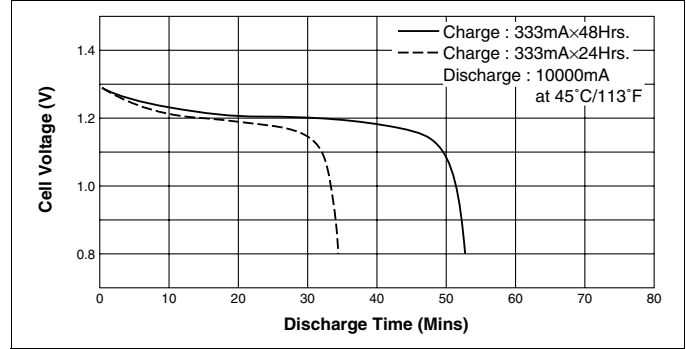

#### Discharge (at low rate)

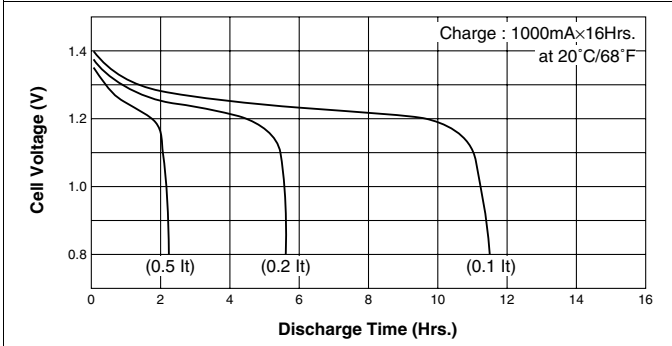

#### Temperature (Charge & Discharge)

