


## Cell Type N-1200SCK Specifications


Nominal Capacity		1200mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	120mA	
	Quick	360mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
Ambient Temperature	Charge	Standard	0°C to +70°C [+32°F to 158°F]
		Quick	10°C to +70°C [+50°F to 158°F]
	Discharge		-20°C to +70°C [-4°F to 158°F]
	Storage		-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		4.2mΩ (at 1000Hz)	
Weight		52g/1.83oz	
Dimensions(D)×(H) (with t ube)		22.9 <sup>0</sup> <sub>-1</sub> × 43.0 <sup>0</sup> <sub>-1.2</sub> mm 0.90 <sup>0</sup> <sub>-0.04</sub> × 1.69 <sup>0</sup> <sub>-0.05</sub> inch	

### Typical Characteristics


#### Charge

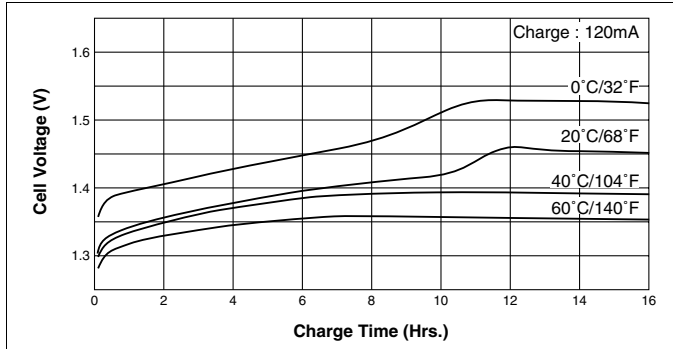


#### Discharge (at high rate)

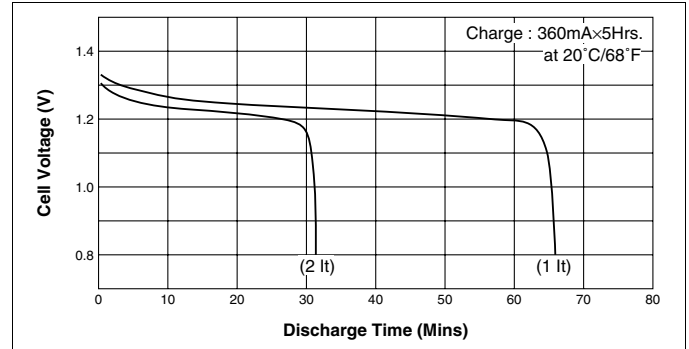


#### Charge

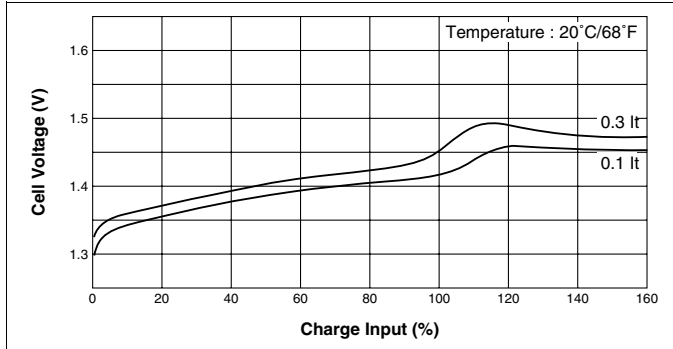

#### Discharge (at high rate)

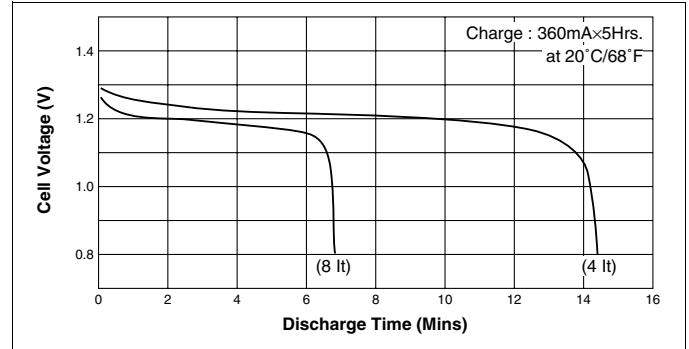

#### Discharge (at low rate)

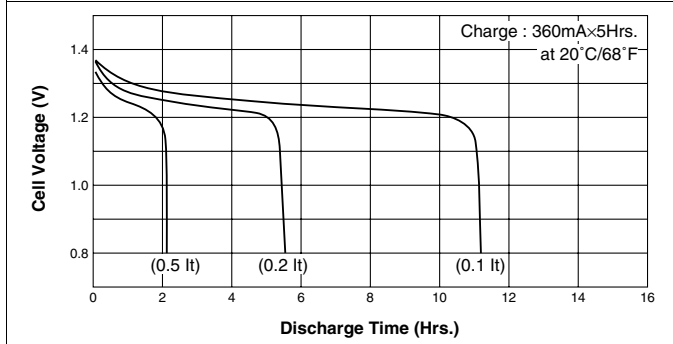

#### Temperature (Charge & Discharge)

