


Specifications

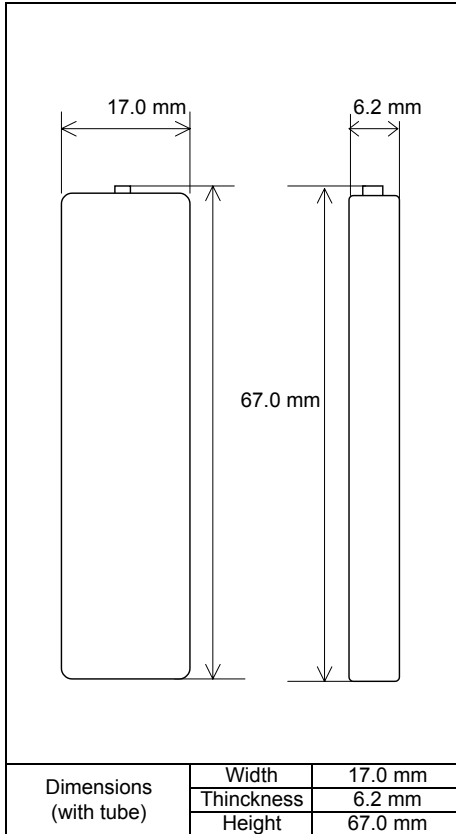

| | | | |
|--|---------------------------|-------------------------------|--------------|
| Type : Nickel-Metal Hydride Battery | | Size : A1 | |
| Capacity ¹⁾ | Typical | 1350mAh | |
| | Minimum | 1250mAh | |
| Nominal Voltage | | 1.2V | |
| Charging Current x Time | Fast Charge ²⁾ | 1350 mA x about 1.1h | |
| Ambient Temp. | Charge Condition | Fast Charge ²⁾ | |
| | Discharge Condition | 0°C - 50°C | |
| | Storage Condition | Less than 30days | -20°C - 50°C |
| | | Less than 90days | -20°C - 40°C |
| Less than 1year | | -20°C - 30°C | |
| Internal Impedance ³⁾ (after discharge to E.V.=1.0V) | | About 20mΩ(at 1000Hz) | |
| Weight ⁴⁾ | | About 26 g | |
| Size ⁴⁾ : (Width) x (Thickness) x (Height) | | 17.0(W) x 6.2(T) x 67.0(H) mm | |

1)Single cell capacity under the following condition.

Charge : 135mA×16h, Discharge : 270mA(E.V.=1.0V) at 20°C


2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

4)With tube.

Typical Characteristics

Charge

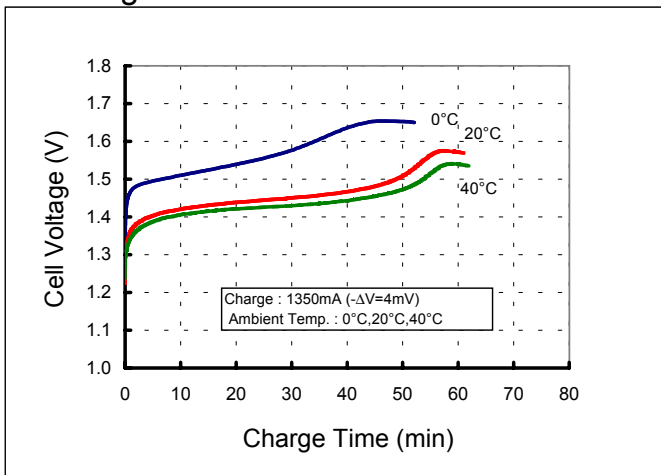

Discharge

