

# High Energy Series

## Nickel-Cadmium

### VE Cs

With the VE series, Saft upgrades its standard technology: it boosts capacity by 10 to 15 % without increasing volume, while at the same time maintaining performance levels.

The VE Cs cell offers significant capacity gains for the same volume, high energy for applications requiring a higher operating time and good storage retention.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

#### Applications

- Professional electronics
- Communication appliances
- Medical equipment
- Lighting equipment

#### Main advantages

- High energy series giving a higher operating time
- Good storage retention
- Fast charge
- Cycling application

#### Technology

- Sintered positive electrode
- Sintered negative electrode

#### Temperature range in discharge

- 40°C to + 60°C

#### Storage

Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %



#### Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	1560
IEC minimum capacity (mAh)*	1400
IEC designation	KRHR 23/43
Impedance at 1000 Hz (m Ω)	5

\* Charge 16 h at C/10, discharge at C/5.

#### Dimensions

Diameter (mm)	22.0 + 0.15/- 0.05
Height (mm)	41.9 ± 0.3
Top projection (mm)	0.8 ± 0.2
Top flat area diameter (mm)	10.0 ± 0.2
Weight (g)	50

Dimensions are given for bare cells.

#### Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast*	~1	+ 10 to + 40	1400
Standard	16	0 to + 50	140
Trickle**			35 to 70

\* End of charge cut-off is requested: -dV or dT°C/dt.

\*\* Trickle charge follows fast charge.

#### Maximum discharge current

Continuous (A) at + 20°C	14.0
Peak (A) at + 20°C*	130

\* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.








**saft**

### Typical performances

For graphs shown, C is the IEC<sub>5</sub> capacity.

Dimensions are in mm.

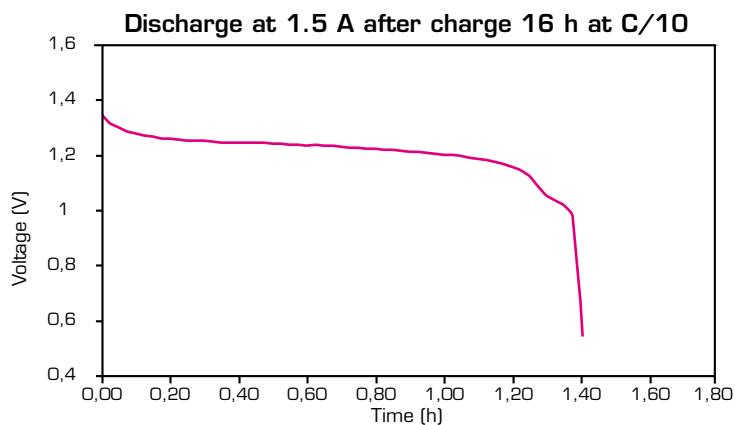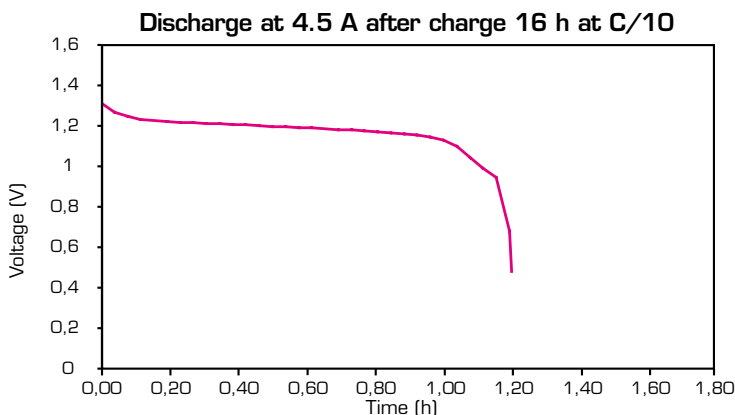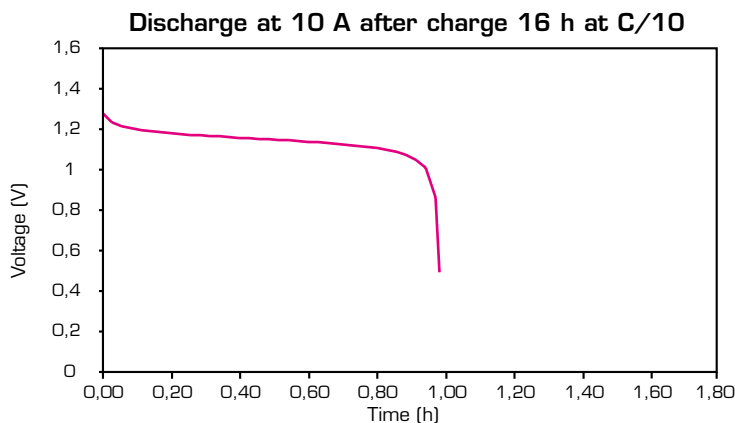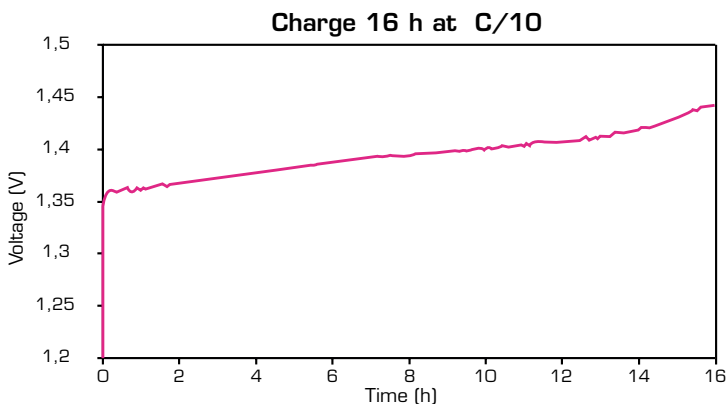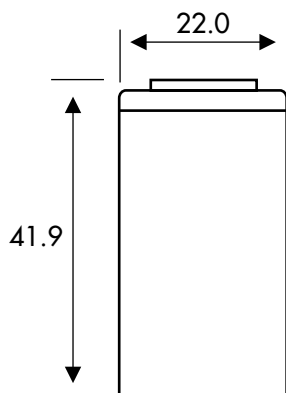

Data are given for single cells.  
Please consult Saft for utilization  
of cell outside this datasheet.

Data in this document are subject to change  
without notice and become contractual only  
after written confirmation by Saft.

## Saft Rechargeable Battery Systems

12, rue Sadi Carnot  
93170 Bagnolet - France  
Tel.: +33 1 49 93 19 18  
Fax: +33 1 49 93 19 68  
Email: rbs.info@saftbatteries.com

[www.saftbatteries.com](http://www.saftbatteries.com)



**SAFT**