

Standard Series

Nickel-Cadmium

VRE Cs 1600

To expand its Ni-Cd offer, Saft has launched new High Energy Ni-Cd Cs cells, the VRE Cs 1600.

Developed to fit Professional electronics and home appliances, these cells are also perfectly designed for all equipment where an extended cycle life and a longer operating time are required.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Power tools
- Radio controls
- Lawn and gardening equipment
- Home appliances
- Payment terminals

Main advantages

- Cycling application
- Fast charge
- Extended cycle life
- Good charge retention

Technology

- Sintered positive electrode
- Plastic bonded negative electrode

Temperature range in discharge

- 20°C to + 60°C

Storage

Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %



Electrical characteristics

Nominal voltage [V]	1.2
Typical capacity [mAh]*	1600
IEC minimum capacity [mAh]*	1500
IEC designation	KRHR 23/43
Impedance at 1000 Hz [m Ω]	< 5

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter [mm]	22.0 + 0.15/- 0.05
Height [mm]	41.9 ± 0.3
Top projection [mm]	0.8 ± 0.2
Top flat area diameter [mm]	10.0 ± 0.2
Weight [g]	48

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast*	~ 1	+ 10 to + 45	up to 1500
Standard	16	0 to + 50	150
Trickle**			37 to 75

* End of charge cut-off is requested: -dV or dT°C/dt.

** Trickle charge follows fast charge.

Maximum discharge current

Continuous [A] at + 20°C	15
Peak [A] at + 20°C*	130

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.




SAFT


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions are in mm.

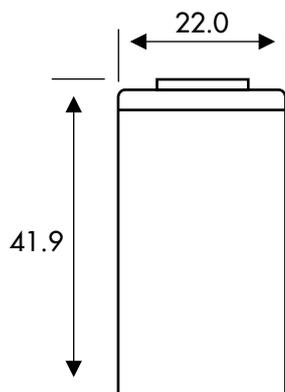


Discharge at different rates after charge 16h at C/10

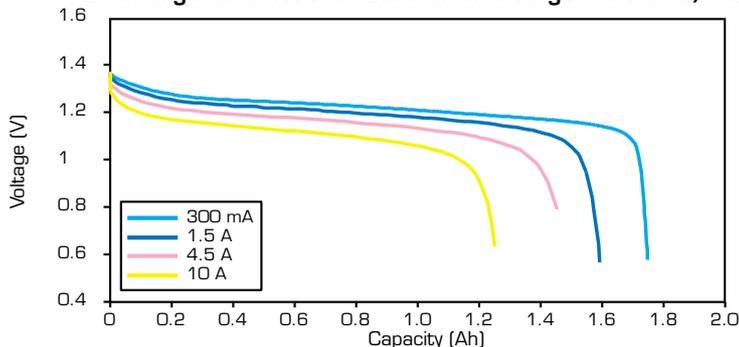

Discharge at 10A and different temperatures, after charge at C

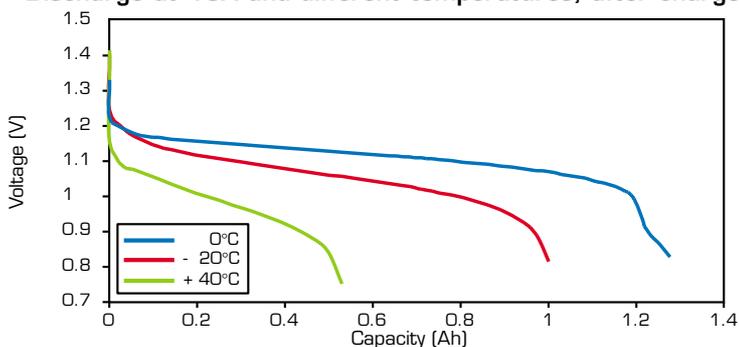

Discharge at 1.5A and different temperatures, after charge at C

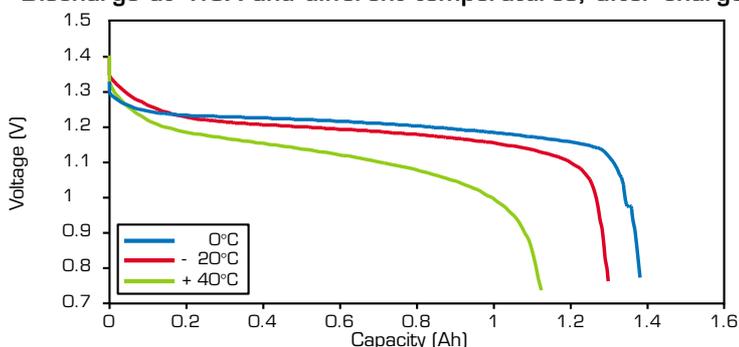

Data are given for single cells.
Please consult Saft for utilization
of cell outside this datasheet.

Data in this document are subject to change
without notice and become contractual only
after written confirmation by Saft.

Saft Rechargeable Battery Systems

12, rue Sadi Carnot
93170 Bagnole - France
Tel.: +33 1 49 93 19 18
Fax: +33 1 49 93 19 68
Email: rbs.info@saftbatteries.com

www.saftbatteries.com



SAFT