

High Temperature Series

Nickel-Cadmium

VT Cs 1600

The VT Cs 1600 is designed to accept a permanent charge in high temperature environments such as security lighting installations.

The VT Cs series offers capacities from 1.35 Ah to 1.75 Ah to fit the needs for energy, required by security and lighting devices.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

Main advantages

- Good charge efficiency at high temperatures
- Permanent charge
- Good storage retention

Technology

- Sintered positive electrode
- Plastic bonded negative electrode

Temperature range in discharge

- 20°C to + 70°C

Storage

Recommended: + 5°C to + 25°C
Relative humidity: 65 ± 5 %



Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	1750
IEC minimum capacity (mAh)*	1600
IEC designation	KRMT 23/43
Impedance at 1000 Hz (m Ω)	<7

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	22.0 + 0.15/- 0.05
Height (mm)	41.9 ± 0.3
Top projection (mm)	0.8 ± 0.2
Top flat area diameter (mm)	10 ± 0.2
Weight (g)	49

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard	16	+ 15 to + 40	160
Permanent		+ 15 to + 40	80
Trickle*			40 to 54

End of charge cut-off is requested: - dV or dT°C/dt.

* Trickle charge follows full charge.

Maximum discharge current

Continuous (A) at + 20°C	5.6
Peak (A) at + 20°C*	40

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.




saft


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions are in mm.

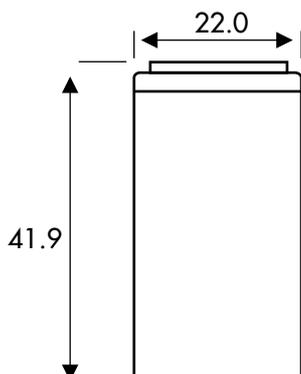


Charge 16 h at C/10

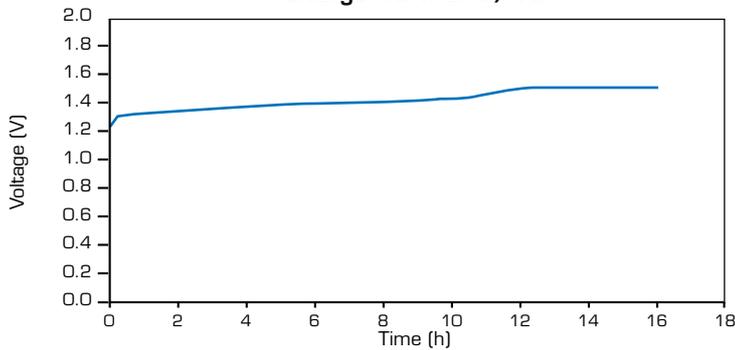


Discharge at different rates after charge at C/10

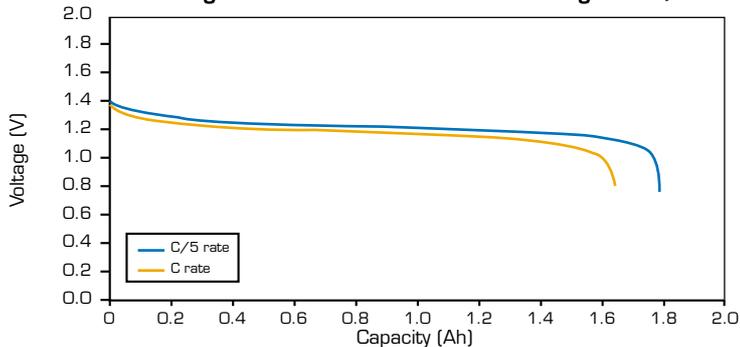

Discharge at 1.6 A after charge 24 h and 48 h at + 40°C

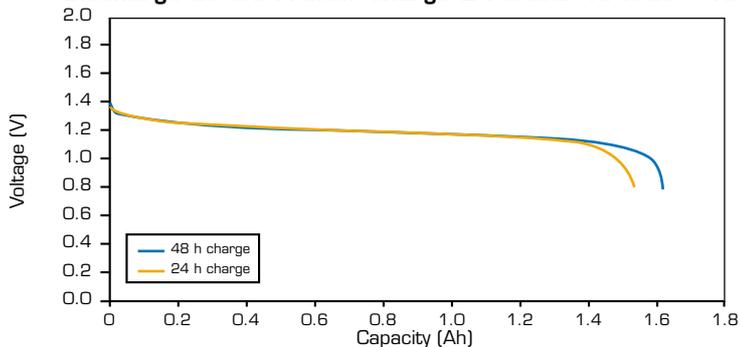

Charge efficiency after different charge rate, discharge at C/2

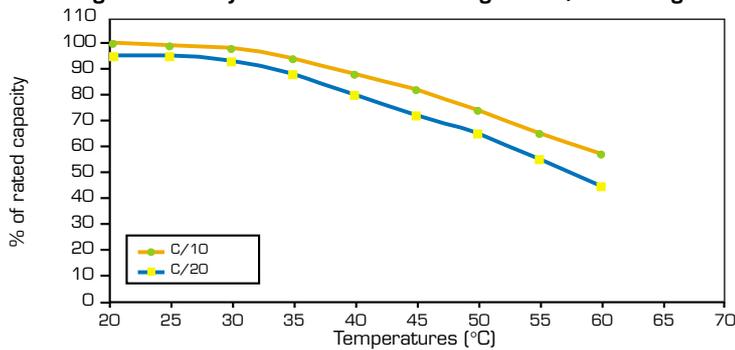

Data are given for single cells.
Please consult Saft for utilization
of cell outside this datasheet.

Data in this document are subject to change
without notice and become contractual only
after written confirmation by Saft.

Saft Rechargeable Battery Systems

12, rue Sadi Carnot
93170 Bagnolet - France
Tel.: +33 1 49 93 19 18
Fax: +33 1 49 93 19 68
Email: rbs.info@saftbatteries.com

www.saftbatteries.com



SAFT