


Cell Type N-50AAAS Specifications


Nominal Capacity		45mAh
Nominal Voltage		1.2V
Standard Charging Current		1.5mA
Charging Time		above 48Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		130.0mΩ (at 1000Hz)
Weight		4g/0.14oz
Dimensions(D)×(H) (with tube)		10.5 ⁰ _{-0.5} × 15.8 ⁰ ₋₁ mm 0.41 ⁰ _{-0.02} × 0.62 ⁰ _{-0.04} inch

Typical Characteristics


Charge

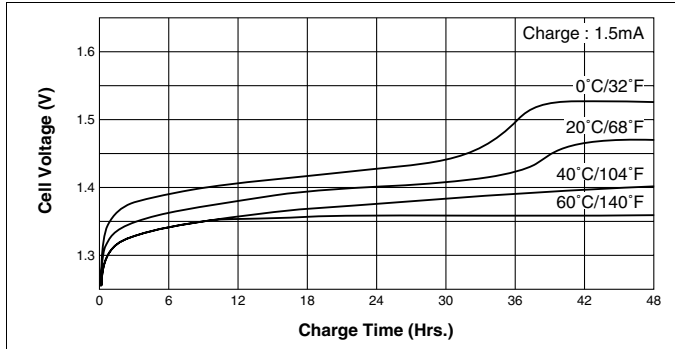


Discharge (at very low rate)

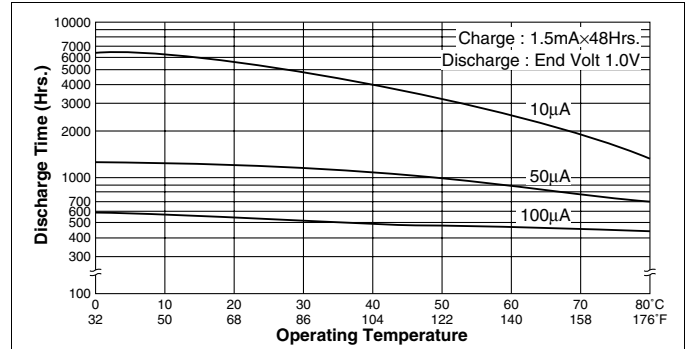


Cell Capacity (at various discharge rate)

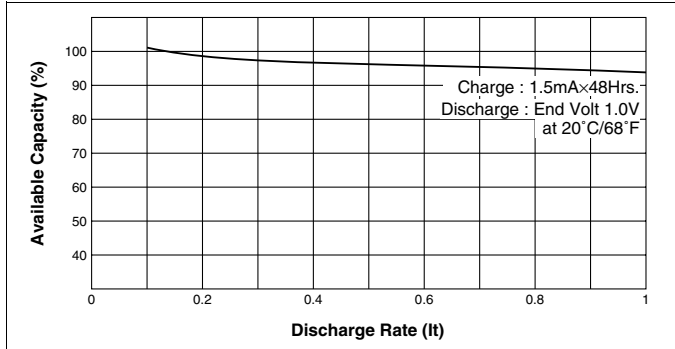

Discharge (at various temperature)

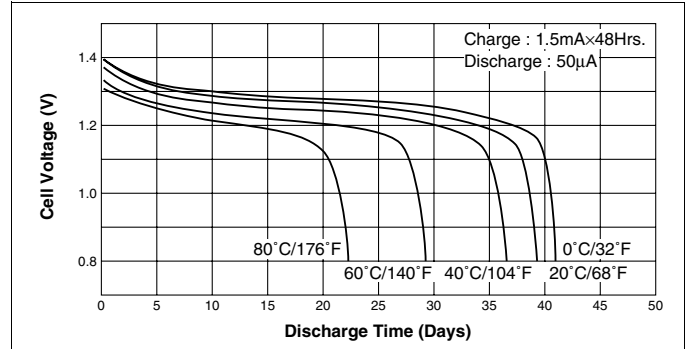

Discharge (at low rate)

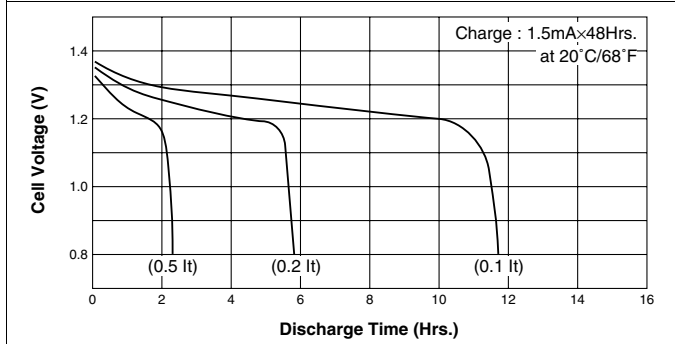

Temperature (Charge & Discharge)

