


Specifications

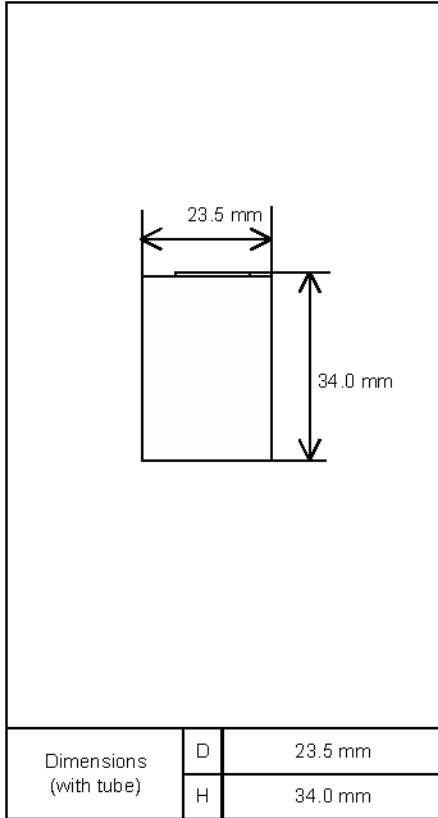


Type : Nickel-Cadmium Battery		Size : 4/5SC	
Capacity ρ	Typical	1700mAh	
	Minimum	1600mAh	
Nominal Voltage		1.2V	
Charging Current \times Time	Standard	170 mA \times about 14 to 16Hrs.	
	Fast	2550 mA \times about 1Hr.	
Ambient Temp.	Charge Condition	Standard	0°C to +45°C [+32°F to +113°F]
		Fast	+5°C to +40°C [+41°F to +104°F]
	Discharge Condition		-20°C to +60°C [-4°F to +140°F]
	Storage Condition		-30°C to +50°C [-22°F to +122°F]
Internal Impedance (Av.) (at 50% discharge)		About 4.5m Ω (at 1000Hz)	
Weight ρ		About 46 g	
Size ρ : (Diameter) \times (Height)		23.5(D) \times 34.0(H) mm	

1) Charge : 170mA \times 16h, Discharge : 340mA(E.V.=1.0V) at 25°C
2) With tube.

Typical Characteristics

Charge

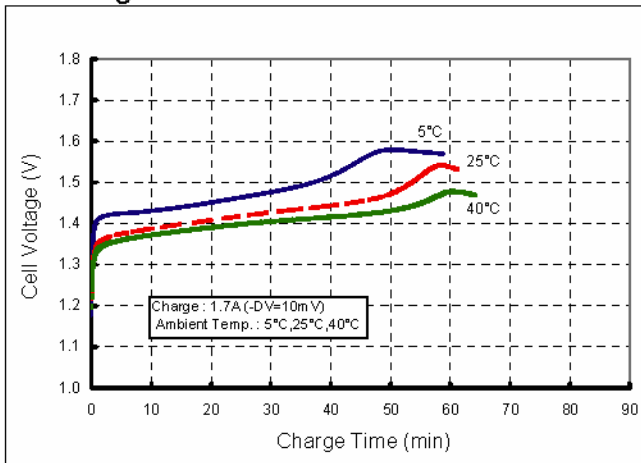

Discharge

