


## Specifications

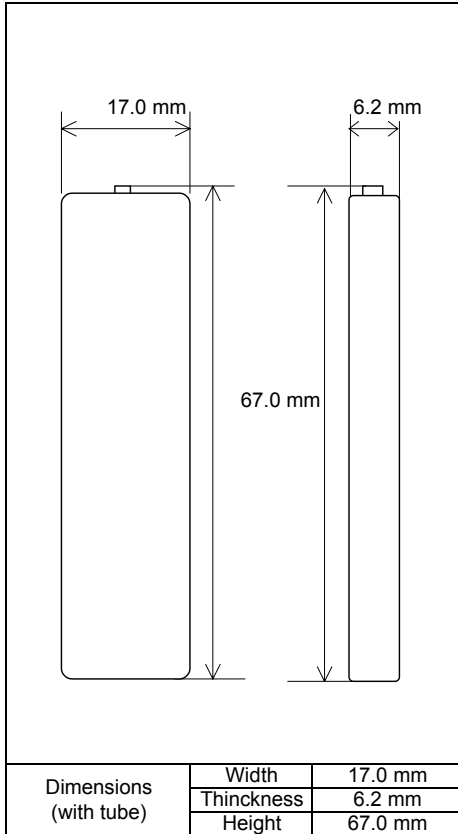


Type : Nickel-Metal Hydride Battery		Size : A1	
Capacity <sup>1)</sup>	Typical	1350mAh	
	Minimum	1300mAh	
Nominal Voltage		1.2V	
Charging Current x Time	Fast Charge <sup>2)</sup>	1350 mA x about 1.1h	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>	
	Discharge Condition	0°C - 50°C	
	Storage Condition	Less than 30days	-20°C - 50°C
		Less than 90days	-20°C - 40°C
Less than 1year		-20°C - 30°C	
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		About 20mΩ(at 1000Hz)	
Weight <sup>4)</sup>		About 26 g	
Size <sup>4)</sup> : (Width) x (Thickness) x (Height)		17.0(W) x 6.2(T) x 67.0(H) mm	

- 1)Single cell capacity under the following condition.  
 Charge : 140mA×16h, Discharge : 280mA(E.V.=1.0V) at 20°C  
 2)Use recommended charging system.  
 3)After a few charge and discharge cycles under the above 1) condition.  
 4)With tube.

## Typical Characteristics

### Charge

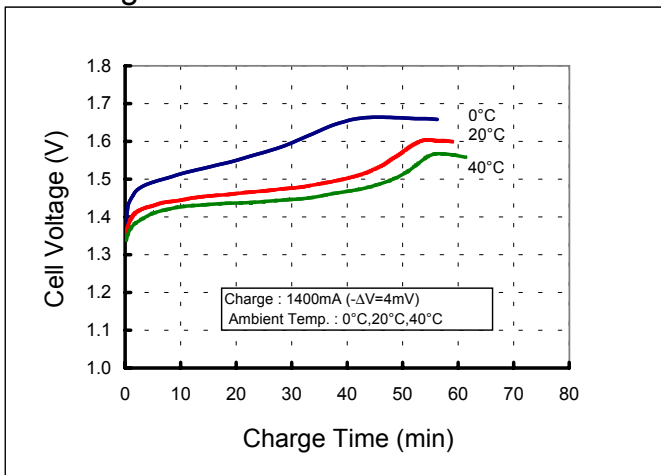

### Discharge

