


Specifications

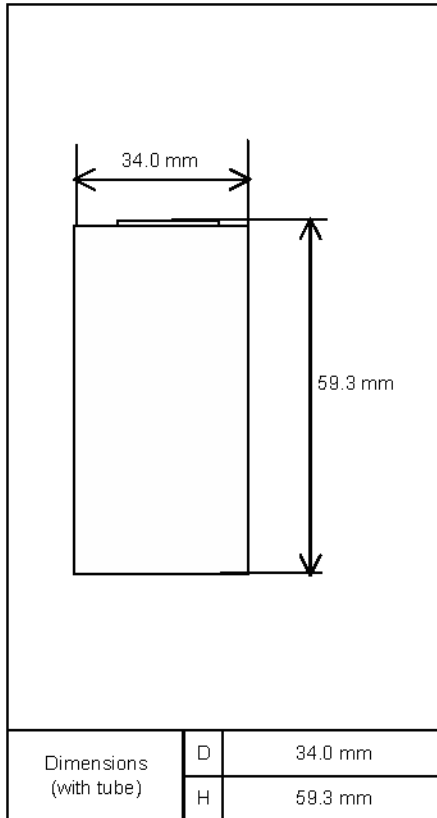


Type : Nickel-Metal Hydride Battery		Size : D	
Capacity ϕ	Typical	9000mAh	
	Minimum	8450mAh	
Nominal Voltage		1.2V	
Charging Current \times Time	Fast Charge ϕ	5000 mA \times about 2h	
Ambient Temp.	Charge Condition	Fast Charge ϕ	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 30days	-20°C - 50°C
Less than 90days		-20°C - 40°C	
Less than 1year		-20°C - 30°C	
Internal Impedance ϕ (after discharge to E.V.=1.0V)		Approx. 5m Ω (at 1000Hz)	
Weight ϕ		Approx. 178 g	
Size ϕ : (Diameter) \times (Height)		34.0(D) \times 59.3(H) mm	

- 1) Single cell capacity under the following condition.
- 1) Charge : 900mA \times 16h, Discharge : 1800mA (E.V.=1.0V) at 20°C
- 2) Use recommended charging system.
- 3) After a few charge and discharge cycles under the above 1) condition.
- 4) With tube.

Typical Characteristics

Charge

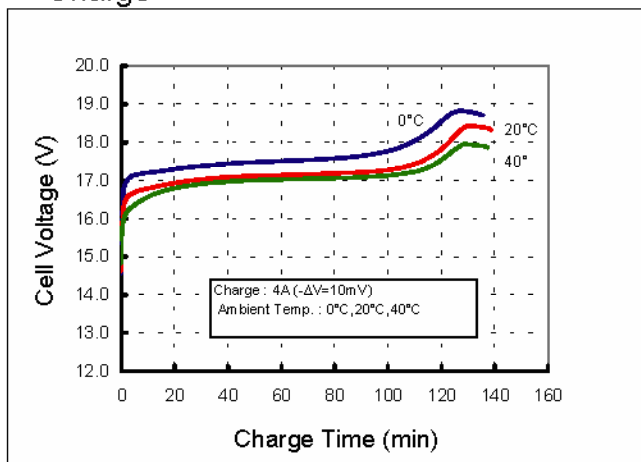

Discharge

