

Keyword:
iXtra - Long Term High Performance

Model: **SL-2790**

Performance Data

(Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	35 Ah
Nominal current	10 mA
Max. continuous discharge current	450 mA
Pulse current capability	1000 mA
Anode surface area	90 cm ²
Lithium content	10 g
Weight	190 g
Volume	105 cm ³
Temperature range	-55°C ... +85°C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100°C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25°C

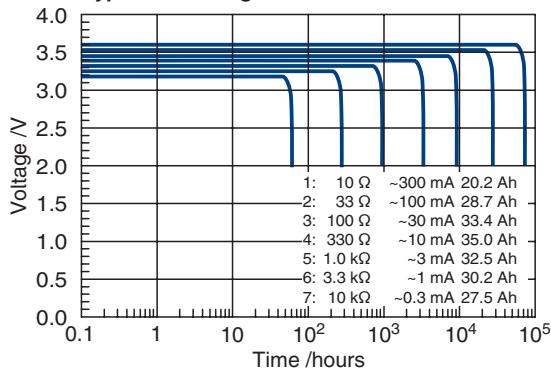


Available Capacity

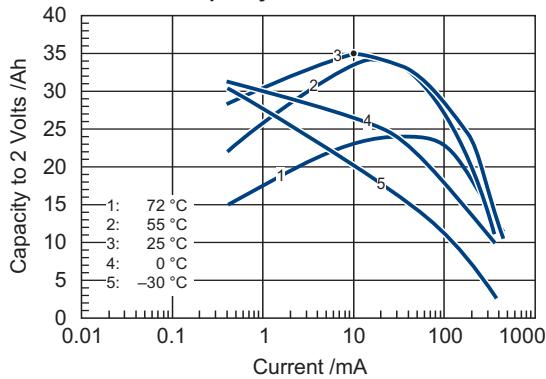

Operating Voltage

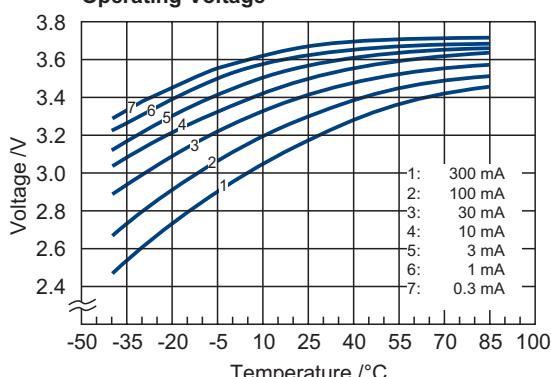

Voltage Response at +25 °C, pulse: 120 mA

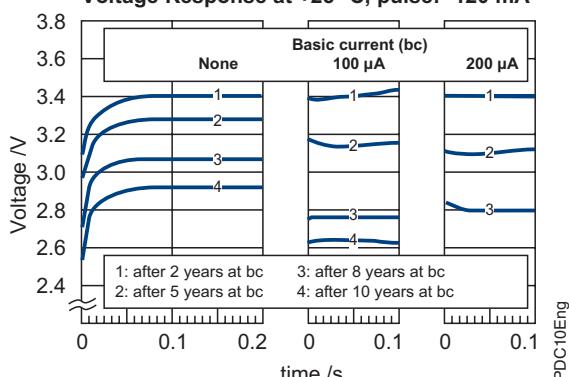

Available Terminations

SL-2790/S Standard
 SL-2790/T Tags

Catalogue No.

11 2 17901 00
 11 2 17902 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.